

# Membrane injection system

## for buildings without a basement

### MIS90S 1x13-21+3x7-13+1x5-13 SET

Article no.: 2900200530, GTIN: 4052487133159



- **Universal building entry with membrane injection system for sloping drill holes through floor slabs or walls**
- **Simultaneous sealing of power and communication services**
- **Controlled ejection of resin through slit membrane hose**



Picture may differ from selected product

Suitable for sloping entry through the wall or floor slab. For reliable sealing of all water and telecommunications lines without additional shrinking using a sealing sleeve.

## FACTS

### Advantages:

- Quick to assemble in just a few minutes
- Not necessary to restore basement seal to DIN 18533
- Flexibility provided by sealing sleeve with segmented ring technology

### Scope of delivery:

- 1 piece MIS90S including pre-mounted sleeve cap
- 1 piece End cap

## Dimensions:

- For core drills ID: 92 - 102 mm
- Overall length: 1300 mm

## Application range:

- DIN 18533 W1-E
- Waterproof concrete stress class 1, waterproof concrete stress class 2

## Material:

- Flange, counter-bearing, sleeve cap, membrane hose: EPDM
- Resin filler hose: PE
- Pipe: PVC-U
- End cap: ZK/NBR (butadiene/acrylonitrile rubber)
- Stainless steel clamping straps: V2A (AISI 304L)

## Tightness:

- gastight and watertight to 1.0 bar

## FEATURES

Number of cables/medium overall:	5
	1
Number of cables/medium:	3
	1
Suitable for medium pipe OD (mm):	13 - 21
	7 - 13
	5 - 13
Overall length (mm):	1300
wall thickness (mm):	200 - 1.200

## PICTURES




# ACCESSORIES REQUIRED



2-component resin M3000



Cartridge gun

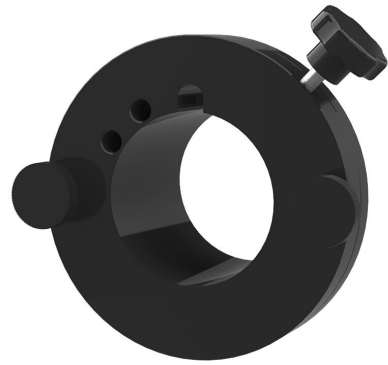

Quick tensioning device