

# System cover

cable seal with cold shrink-fit method


## HSI90 D6x20 KS

Article no.: 2206050070, GTIN: 4052487061131



- **Mechanical fixing (bayonet) and seal (clamping nut) act independently**
- **Bayonet system with return lock and locking screw connection (for protection against automatic opening)**

For use in wall insert and aluminium flange HSI90. The cold shrink sleeves support a wide area of application. They are shrunk onto the cables by the system cover socket without tools. Empty system cover sockets can be sealed with blind plugs.

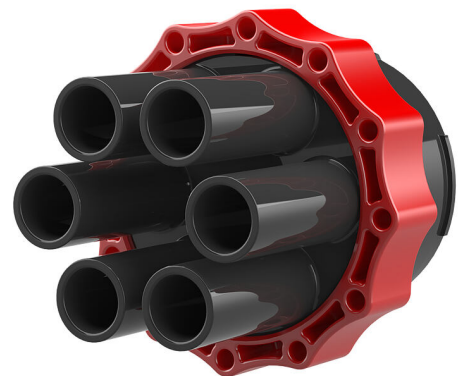

Picture may differ from selected product

## FACTS

### Advantages:

- wide area of application
- Best possible shrink result thanks to centring straps
- Gentle sealing
- Shrink-fit method without tools
- Permanently elastic shrink tubing

### Scope of delivery:

- Cold shrink sleeves
- Centring strap for HSI 90-D1/75-KS

### Properties:

- The cold shrink-fit method is used on the outside of the building

## Material:

- System cover with socket: polycarbonate
- Clamping nut: PC/PBT blend
- Shrink tubing: EPDM
- Centring strap: EPDM

## Tightness:

- gastight and watertight to 2.0 bar

## FEATURES

|                                    |       |
|------------------------------------|-------|
| Socket diameter:                   | 20    |
| Number of cables/medium:           | 6     |
| Area of application cable OD (mm): | 14-18 |

## ACCESSORIES REQUIRED



Flexible socket wrench