

# BD-Fix with foil flange

## Slab entry


### BDFF160 KG2000

Article no.: 3030400300, GTIN: 4052487231343



- **Ready for installation in the slab**

For connecting KG/HT pipes. Gastight and watertight connection to the slab thanks to integrated water barrier flange. With foil flange for connection to a bituminous thick coating, weldable sheet or vapour barrier.

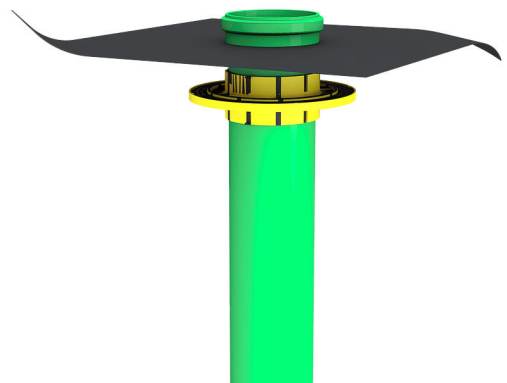

Picture may differ from selected product

## FACTS

### Advantages:

- Easy connection of the seal or vapour barrier by means of foil flange
- No interruption of the waste water pipe system
- radon tight

### Application range:

- DIN 18533 W1-E
- Waterproof concrete stress class 1, waterproof concrete stress class 2

### Material:

- KG pipe: PVC-U/KG 2000 pipe: PP
- Water barrier flange: ABS/TPE
- Foil flange: EPDM



## Tightness:

- Pressure tight up to 5,0 bar  $\triangleq$  50 m water column
- radon tight

## FEATURES

Suitable for medium pipe OD (mm):	160
Type:	KG2000
Packing unit:	1