


# Fixed/loose flange wall sleeve galvanised

## for retrofit dowelling for black tank

FLFA1x200/80/0 DIN18533 St-A3C

Article no.: 3030353448, GTIN: 4052487226899

For dowelling with wall sleeves, core drills or breakthroughs.

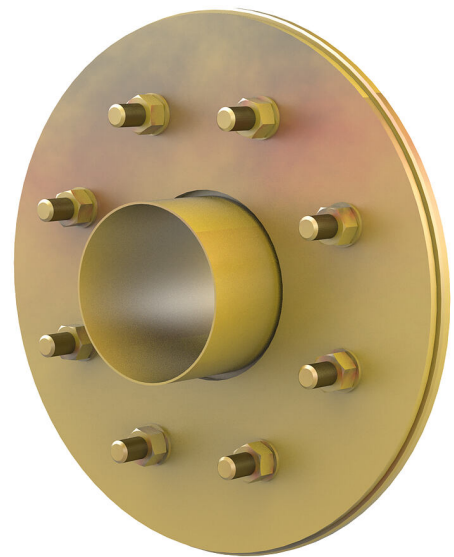

Picture may differ from selected product

## FACTS

### Scope of delivery:

- 1 piece Fixed/loose flange wall sleeve
- Fastenings for concrete
- Nuts

### Dimensions:

- Standard upper length: 80 mm
- Design according to DIN 18533 includes: underground structural components
- Standard fixed flange  $\text{Ø}a$  equal to the relevant wall sleeve  $\text{Ø}i$  + approx. 330 mm (for one passage)

## Application range:

- DIN 18533 W1-E, DIN 18533 W2.1-E, DIN 18533 W2.2-E

## Material:

- Fixed/loose flange wall sleeve steel galvanised (gv)
- Fastenings: stainless steel V4A (AISI 316L)
- Nuts: Steel galvanised (gv)


## Tightness:

- gastight and watertight

## FEATURES

|                                 |     |
|---------------------------------|-----|
| Wall sleeve ID (mm) D1:         | 200 |
| Fixed flange OD (mm) D2:        | 530 |
| Loose flange OD (mm) D3:        | 520 |
| Wall sleeve wall thickness (mm) | 2   |
| S:                              |     |

## PICTURES

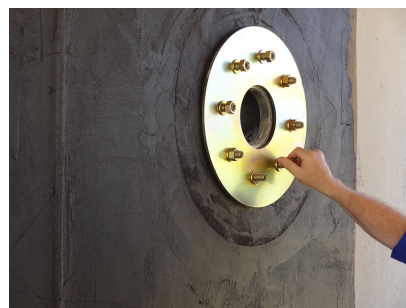

# ACCESSORIES REQUIRED



Rubber inlays